

# ROCKFORD

---

## Tables



RF-C4565RL

45"D X 65"W X 22"-32"H

# ROCKFORD

## Rectangle



### ROCKFORD RECTANGLE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C2436	24	36	22-32
RF-C2442	24	42	22-32
RF-C2448	24	48	22-32
RF-C2460	24	60	22-32
RF-C2472	24	72	22-32
RF-C3036	30	36	22-32
RF-C3042	30	42	22-32
RF-C3048	30	48	22-32
RF-C3060	30	60	22-32
RF-C3072	30	72	22-32

## Beanie



### ROCKFORD BEANIE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C3060BNR	30	60	22-32


## Square



### ROCKFORD SQUARE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C4242	42	42	22-32
RF-C4848	48	48	22-32
RF-C6060	60	60	22-32

## Diamond



### ROCKFORD DIAMOND STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C3242DM	32	42	22-32
RF-C3746DM	37	46	22-32

## Trapezoid



### ROCKFORD TRAPEZOID STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C30TRP	30	30	22-32

## Pickle



### ROCKFORD PICKLE STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C3660G	36	60	22-32

## Sprocket



### ROCKFORD SPROCKET STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C6060S	60	60	22-32

## Flair



### ROCKFORD FLAIR STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C3060FLR	30	60	22-32

## Raetsel



### ROCKFORD RAETSEL STANDARD SIZE

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C4565RL	45	65	22-32
RF-C4565RL-14	45	65	14

## Round



### ROCKFORD ROUND STANDARD SIZES

MODEL	DIAMETER"	HEIGHT"
RF-C0042	42	22-32
RF-C0048	48	22-32
RF-C0060	60	22-32

## Pac Man



### ROCKFORD PAC MAN STANDARD SIZES

MODEL	DIA	HEIGHT"
RF-C0042PAC	42	22-32
RF-C0048PAC	48	22-32

## Secil



### ROCKFORD SECIL STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C3772SC	37	72	22-32

## Crescent



### ROCKFORD CRESCENT STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C3672CR	36	72	22-32

## "D" Shape



### ROCKFORD "D" STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C3672D	36	72	22-32
RF-C4872D	48	72	22-32
RF-C6072D	60	72	22-32

## Clover



### ROCKFORD CLOVER STANDARD SIZES

MODEL	DEPTH"	WIDTH"	HEIGHT"
RF-C4848CL	48	48	22-32
RF-C6060CL	60	60	22-32

## Quarter Round



### ROCKFORD QTR ROUND STANDARD SIZES

MODEL	DIAMETER	HEIGHT"
RF-C36QR	24/36	22-32

- The addition of casters will change the adjustable height range to 24" to 34"


# ROCKFORD



RF-C4565RL  
\*Shown with Tangerine PVC Edge and powder coat.

## ROCKFORD Tables

- A variety of shapes and sizes allow collaboration in an ever-changing environment.
- 1-1/4" thick top with high-pressure laminate work surface and PVC edgebanding.
- Rigid 14-gauge two-piece steel adjustable legs, 22" to 32" heights. (The addition of casters will change the adjustable height range to 24" to 34")
- Standard leg finishes are (Top/Bottom): Silver/Silver, Black/Black, Black/Silver. Different powder coat colors are available upon request (may incur an upcharge).

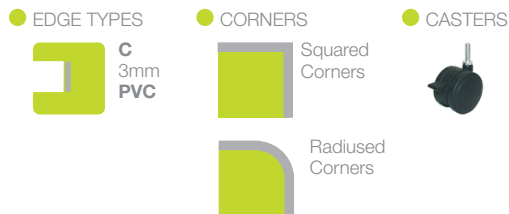

## To Order, Choose Finish Selections & Options

**Work Surface:** Choose from our selection of high-pressure laminates.

**Edge:** Choose from our selection of PVC edges.

**Base:** Choose from our selection of powder coats; indicate uniform color or top/bottom colors.

See **mediatechnologies**<sup>®</sup> finish selections at <https://www.mediatechnologies.com/resources/finishes>

## ACCESSORIES



## General Specifications

**Work Surface:** Table tops are 1-1/4" thick, with a 1-1/8" thick, three-ply particleboard core with .050 high-pressure laminate top and a .030" or thicker phenolic backer. Edges are 3mm PVC.

**Adjustable Leg:** Each leg is composed of an outer steel tube and an inner steel tube that can slide within it. The outer steel tube has a welded mounting plate that is 1/8" thick steel, welded to outer leg at the top and a reinforcement gusset of 1/8" thick steel, welded to mounting plate and outer leg. Each leg is provided with a leveling glide at the bottom.

**Outer Tube:** 14 gauge steel, 1-1/2" outer diameter, approx. 1-1/4" inner diameter. Perforated near the bottom with pass-through holes for (2) adjustment screws.

**Inner Tube:** 14 gauge steel, 1-1/4" outer diameter. Perforated and tapped for adjustment screws on 1" center to center distance providing for an adjustment range of 8". Adjustment screws must thread into inner leg and not just contact it.

**Gusset:** 1/8" thick steel, welded to mounting plate and outer tube.

**Mounting Plate:** 1/8" thick steel, welded to outer tube and gusset. Each leg is mounted to the table with seven (7) 1" #12 wood screws. Insert & machine thread screw (metal-to-metal) available upon request.



cs-rockford-200616

892 Industrial Park Drive  
Shelby, MI 49455  
P: 231.861.2194  
F: 231.861.6678  
[www.mediatechnologies.com](http://www.mediatechnologies.com)  
[sales@mediatechnologies.com](mailto:sales@mediatechnologies.com)

