

WINK

Interactive



WNK-60-7230

30"D X 72"W X 18"SH

WINK



WNK-30-7230



WNK-3030



WNK-6030



WNK-60-7230-MFD

WINK

- Wink... organic and structured. Upholster in one pattern, or play on the curves and use two fabric choices.
- 2-Piece 18mm hardwood plywood frame.
- 4" of high-density base foam on seat top surface and seatback. An additional 1" of topper foam covers front, seat top, seat back and back top.
- 1/2" of foam on back and sides of unit.
- Base is 1" thick black melamine with a 3mm black PVC edge and is fitted with 1"H ABS self leveling glides.

To Order, Choose Finish Selections & Options

Seat & Seat Back: Choose from our selection of fabrics.

View our fabric choices at <https://www.mediatechnologies.com/resources/fabrics>

WINK CURVED STANDARD SIZES


MODEL	SEAT DEPTH"	DEPTH"	WIDTH"	SEAT HEIGHT"
OVERALL HEIGHT 33"				
WNK-30-7230	20	30	37.3	18
WNK-60-7230	20	30	72	18

WINK STRAIGHT STANDARD SIZES

MODEL	SEAT DEPTH"	DEPTH"	WIDTH"	SEAT HEIGHT"
OVERALL HEIGHT 33"				
WNK-3030	20	30	30	18
WNK-6030	20	30	60	18

WINK FACETED CURVE STANDARD SIZES

MODEL	SEAT DEPTH"	DEPTH"	WIDTH"	SEAT HEIGHT"
OVERALL HEIGHT 33"				
WNK-60-7230-MFD	20	30	72	18

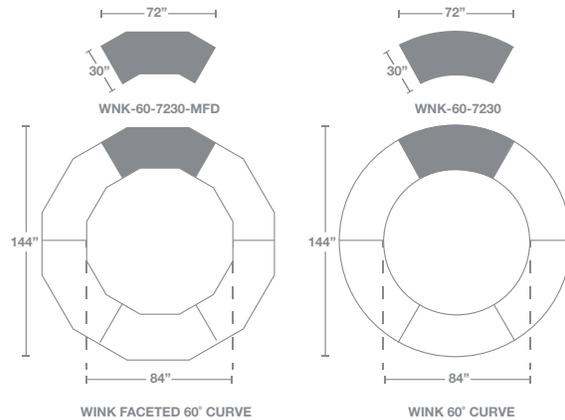

General Specifications

Seat: Seat is constructed of 4/4 Alder hardwood frame and is glued and stapled. 4/4 hardwood corner blocks are glued and stapled to the inner seat frame. The seat is covered with 5" of foam with 1.8 density and a 36 ILD rating.

Back: The back is constructed of a 4/4 Alder hardwood frame is glued and stapled. 4/4 hardwood corner blocks are glued and stapled to the inner back frame. The back is then covered with 2.5" of foam with 1.8 density and a 24 ILD rating. The back is secured to the seat with T-nuts and 4 bolts.

Glides: Seats are fitted with 1"H ABS self-leveling glides.

Connectivity option is available on flat surfaces of the bench base.



892 Industrial Park Drive
 Shelby, MI 49455
 P: 231.861.2194
 F: 231.861.6678
www.mediatechnologies.com
sales@mediatechnologies.com

cs-wink-211216

