


Rockford

Tables



Hardware Included:

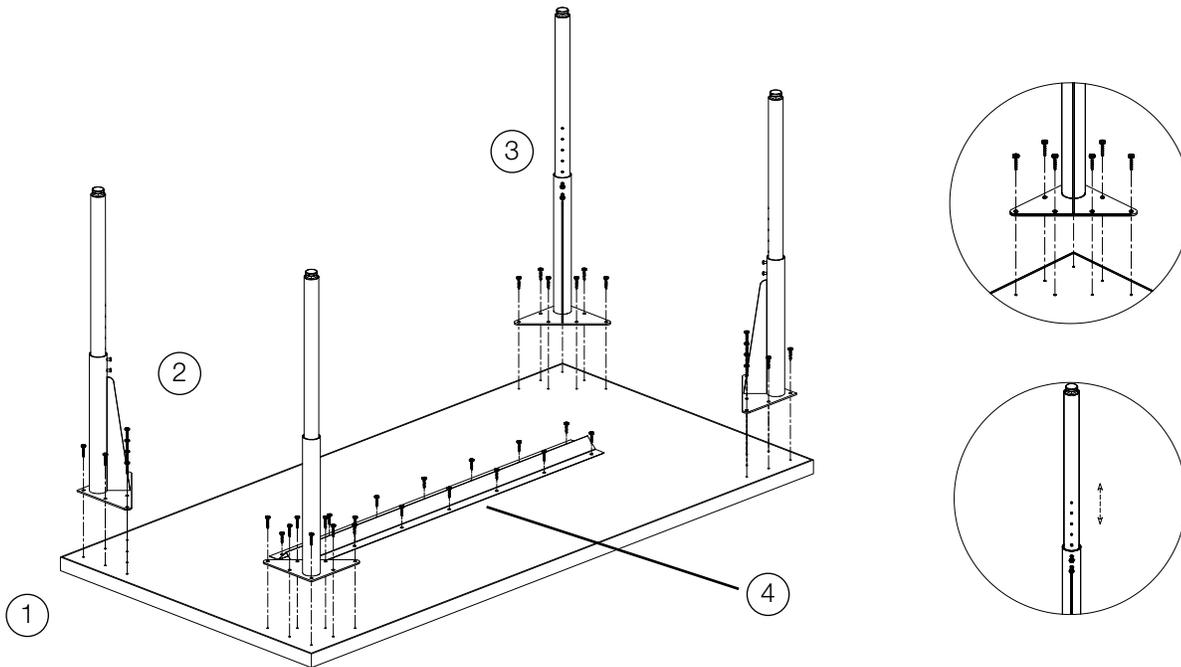

#12 x 1" screw

Tools Required:

- #2 Phillips Head Screwdriver
- #3 Phillips Head Screwdriver

Step 1:

Place the table top upside down on a clean, padded surface.

Step 2:

To attach leg assembly, align leg plate with locating holes on underside of top. Attach leg assembly to top using #12 x 1" screws. (Do not over tighten).

Step 3 (optional):

To adjust leg height, loosen #10-32 x 1/2" TAP-TITE BH screws until the bottom leg section is loose, adjust leg to desired height and secure by tightening the TAP-TITE screws. **NOTE:** the plastic bushing must be installed in between the upper and lower leg.

Keel required for tables 60"+.

Step 4 (if applicable):

To attach table support keel, center keel along midline and equal distance from each end using #12 x 1" screws.

instructions-alba-200113

