

Tall Cabinet Installation Guide

Tool Required:
 Phillips Screwdriver


With upper and lower horizontal mounting tracks in place and properly installed, you are ready to "mount" elements Cabinets.

NOTE: More than one person is required for installations. Mount Wall Cabinets to upper track before mounting Base Cabinets to lower track.

1 Tall Cabinets (36" in width or less) have 4 clips on the back side of the cabinet and are required to be mounted on the upper and lower tracks.



2 Loosen all four clip screws and height adjusting screws to extend and raise the clip hooks.

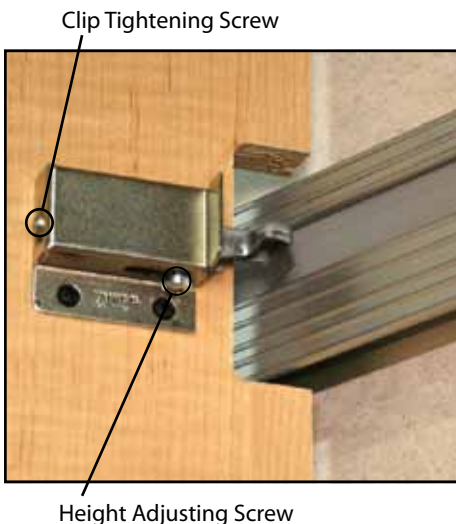


3 Carefully position the cabinet clips to the track.



It is important that cabinet clips are positioned properly so that all 4 of them make the correct contact, (see below). This will ensure that the weight of the cabinets is being distributed evenly on the upper & lower track.

4 All 4 clips should be flush to the track.

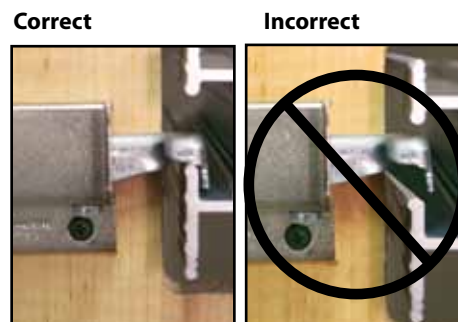

5 Ensure weight is distributed evenly. If necessary lower hooks by adjusting screws.



To Remove Cabinets:
 Loosen the clip screws and lift cabinet until the lip of the cabinet clips can clear the track, moving slowly away from the walls.

Improper Installment Voids the Warranty.