


Seismic Installation Guide

Tool Required:
Phillips Screwdriver

Note: This is a requirement for all elements products installed in seismic areas.

1 Once the elements product is mounted on the track, turn the height adjusting screw to raise the cabinet to its highest point. When height screws are adjusted tighten the clip screw.

Cabinet Notch

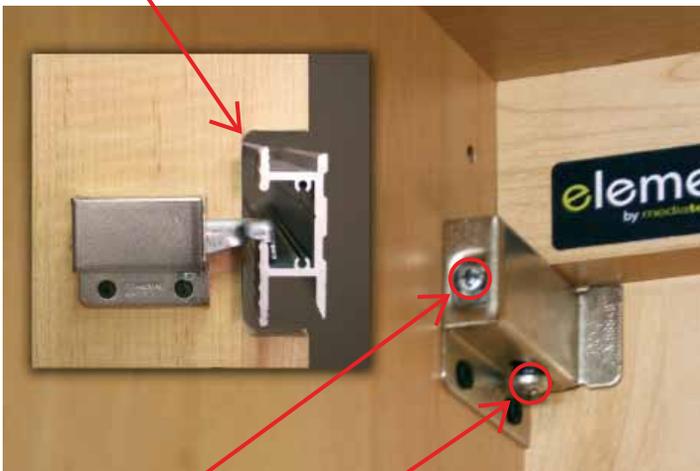


Clip Screw

Height Adjusting Screw

2 Check that the cabinet notch is adjusted as high as possible, (see below).

Correct

Incorrect

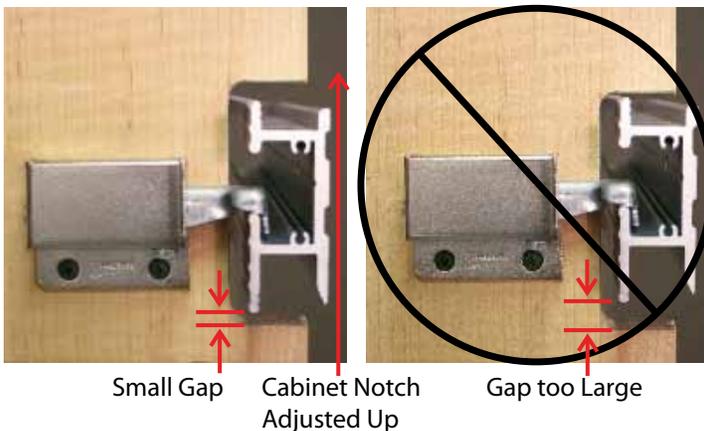

Small Gap

Cabinet Notch Adjusted Up

Gap too Large

3 Raising the cabinet to the highest point prevents the cabinet from being dislodged from the track.



Note: Cabinet notches must be lowered back to the center position to allow for reconfiguration or removal of the cabinet.