

GROOTABLE

Tables




GRT-C3060-29

30"D X 60"W X 29"H

GROOTABLE



GRT-C3060-29

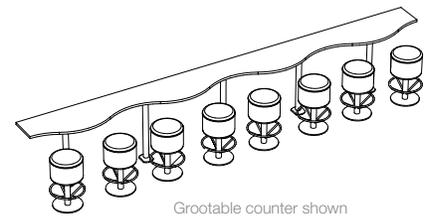

Grootable counter shown with Push Pop stools

GROOTABLE MOUNTED BASE TABLE

- High-pressure laminate work surface with 0.030" phenolic backer. Edges are 3mm PVC.
- Welded and bolted column base is 3" diameter powder coated 16 gauge steel tubing.
- Top mounting plate is 6" x 9".
- Floor mounting plate is 5-1/2" x 7-1/4" x 1/4" steel plate with a 2-1/2" diameter wire access hole. Molded plastic cover with black finish hides mounting screws in floor.
- *Floor mounting hardware not included.

EDGE TYPES



C
3mm
PVC edges

GROOTABLE RECTANGULAR STANDARD SIZES

| MODEL | DEPTH" | WIDTH" | HEIGHT" |
|------------|--------|--------|---------|
| GRT-C2436- | 24 | 36 | 29 |
| GRT-C2448- | 24 | 48 | 29 |
| GRT-C2460- | 24 | 60 | 29 |
| GRT-C2472- | 24 | 72 | 29 |
| GRT-C3036- | 30 | 36 | 29 |
| GRT-C3048- | 30 | 48 | 29 |
| GRT-C3060- | 30 | 60 | 29 |
| GRT-C3072- | 30 | 72 | 29 |

To Order, Choose Finish Selections & Options

Work surface: Choose your high pressure laminate and PVC edge band colors.

Legs: Standard powder coat is black unless specified otherwise.

See **mediatechnologies'** Finish selections at <https://www.mediatechnologies.com/resources/finishes>

POWER/CONNECTIVITY

- 2 power/2 active USB
- 1 open port
- 72" long cord
- Black or white finish



General Specifications

Table Top: Table tops are 1-1/4" thick, three-ply 45# particleboard construction with .050" high-pressure laminate top surface and a .030" phenolic backer. Square corners on banded tops have a 1/8" radius. Edges are 3mm PVC.

Mounted Column Base: 16 gauge powder coated steel tube, 3" column with 6" x 9" x 1/4" steel top mounting plate. Welded floor mounting plate is 5-1/2" x 7-1/4" x 1/4" steel plate with a 2-1/2" diameter wire access hole. Molded plastic cover with black finish hides mounting screws in floor.

Customer to provide (4) floor anchors per base.
5/16" anchors required in cement.
3/8" toggles required in wood.

Connectivity wiring can be routed through the column tube or externally through the use of an optional raceway.



grootable_cs_181019

892 Industrial Park Drive
Shelby, MI 49455
P: 231.861.2194
F: 231.861.6678
www.mediatechnologies.com
sales@mediatechnologies.com

