


General Specifications

Table tops: 1-1/4" thick, three-ply 45# particleboard construction with a .050" high pressure laminate top surface and a .030" phenolic backer. 3mm PVC edgeband.
Corners for rectilinear tops: square corners on banded tops have a 1/8" radius.
Typical worksurface height is 29". Overall carrel height is 40"

Privacy panels: 1" thick, three-ply 45# particleboard construction with a .050" high pressure laminate surfaces. 3mm PVC edgeband.

Leg and Frame Assembly: Welded end frames consist of 1-1/2" square, 14 gauge steel tubing. End frames are connected to (2) 1-1/2" square steel tube spanners using 1/4-20 machine bolts. 3/4" diameter X 3/4"H spacers are placed between the top and the understructure. Frame assembly attaches to worksurface using 1/4-20 machine bolts. Legs are fitted with adjustable glides.

Finish: See **mediatechnologies®** Finish and Color Guide for choices.

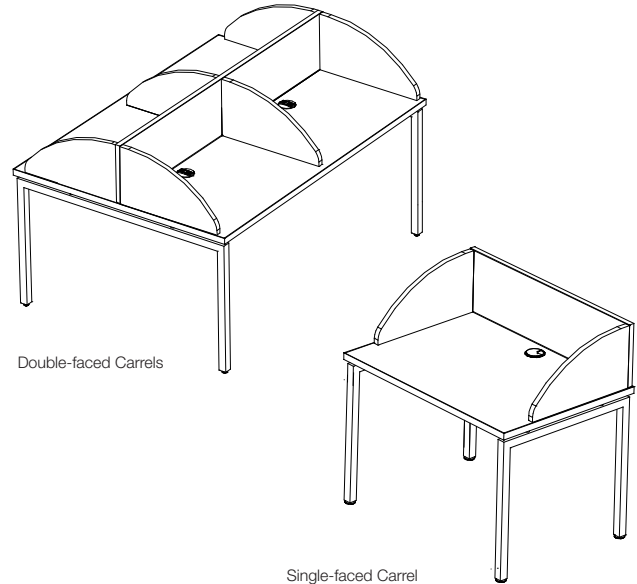

Double-faced Carrels

Single-faced Carrel

Required to order: Model # including options if applicable

- HPL selection
- PVC selection
- powder coat selection



GTX Carrel Tables

Single-Faced

Model Number	Top Dimensions	Wgt	List Price
GTXSCT-C2436-29	24"D X 36"W	73	\$1,393
GTXSCT-C2460-29	24"D X 60"W	97	\$1,564
GTXSCT-C2472-29	24"D X 72"W	109	\$1,717
GTXSCT-C3036-29	30"D X 36"W	83	\$1,491
GTXSCT-C3060-29	30"D X 60"W	110	\$1,673
GTXSCT-C3072-29	30"D X 72"W	124	\$1,837

Double-Faced

Model Number	Top Dimensions	Wgt	List Price
GTXDCT-C4836-29	48"D X 36"W	133	\$1,610
GTXDCT-C4860-29	48"D X 60"W	173	\$1,875
GTXDCT-C4872-29	48"D X 72"W	197	\$2,061
GTXDCT-C6036-29	60"D X 36"W	153	\$1,789
GTXDCT-C6060-29	60"D X 60"W	199	\$2,008
GTXDCT-C6072-29	60"D X 72"W	227	\$2,205

Carrels are face-to-face with a privacy panel between

- Typical worksurface height is 29"
- Typical carrel height is 40"
- One wire management grommet per user location is standard