

### General Specifications


**Table tops:** 1-1/4" thick, three-ply 45# particleboard construction with a .050" high pressure laminate top surface and a .030" phenolic backer.

Corners for rectilinear tops: square corners on banded tops have a 1/8" radius.

**Leg and Frame Assembly:** Welded end frames consist of 1-1/2" square, 14 gauge steel tubing. End frames are connected to (2) 1-1/2" square steel tube spacers using 1/4"-20 machine bolts. 3/4" diameter X 3/4"H spacers are placed between the top and the understructure. Frame assembly attaches to worksurface using 1/4"-20 machine bolts. Legs are fitted with adjustable glides.

**Modesty Panel:** Panels are 3/4" thick, three ply 45# particle board construction with .050" high pressure laminate on both faces. Edge is 3mm PVC or Wood with a 1/8" radius top and bottom. Modesty panels connects to one horizontal spanner via 1/4"-20 bolts and inserts.

**Finish:** Standard powder coat on all metal parts is black; other colors may be specified. See **mediatechnologies®** Finish and Color Guide for choices.

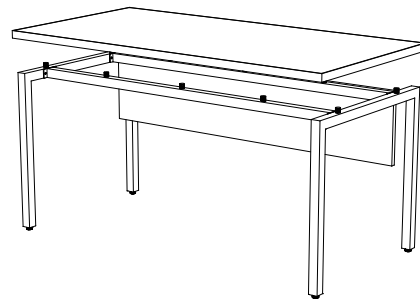

Desk



GTX Desk			
Model Number	Description	Wgt	List Price
3mm PVC Edges			
GD-C3060-29	GTX Desk, 30" x 60" x 29"H	120	\$1,353
GD-C3072-29	GTX Desk, 30" x 72" x 29"H	131	\$1,469

**Required to order:** Model # including options if applicable

- HPL selection
- PVC selection
- powder coat selection